

MODEL TL-6902



International size reference: 1/2AA, ER14252

TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)



■ Nominal capacity @ 1 mA, to 2V	1.0 Ah
■ Rated voltage	3.9 V
■ Weight	9.6g (0.339 oz)
■ Volume	4 cc
■ Operating temperature range	-40°C to +85°C
■ U.L. Component Recognition, MH 12193	

TADIRAN
LITHIUM
BATTERIES

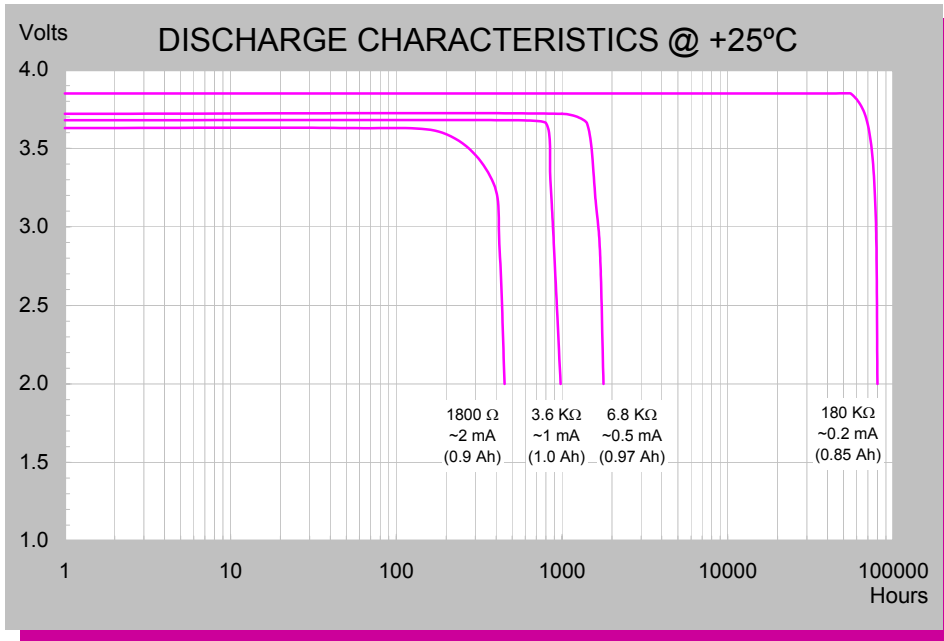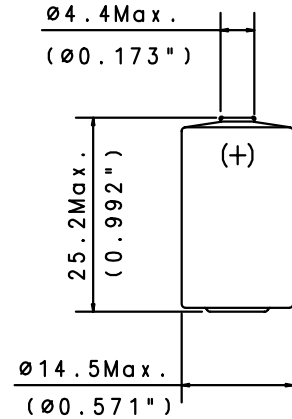

AVAILABLE TERMINATIONS

SUFFIX- /S STANDARD	15-6902-21000
SUFFIX- /T SOLDER TABS	15-6902-31000
SUFFIX- /P AXIAL PINS	15-6902-41000
SUFFIX- /PT2 RADIAL PINS	15-6902-36000
SUFFIX- /TP POLARIZED TABS	15-6902-52000
SUFFIX- /PT POLARIZED TABS	15-6902-53000

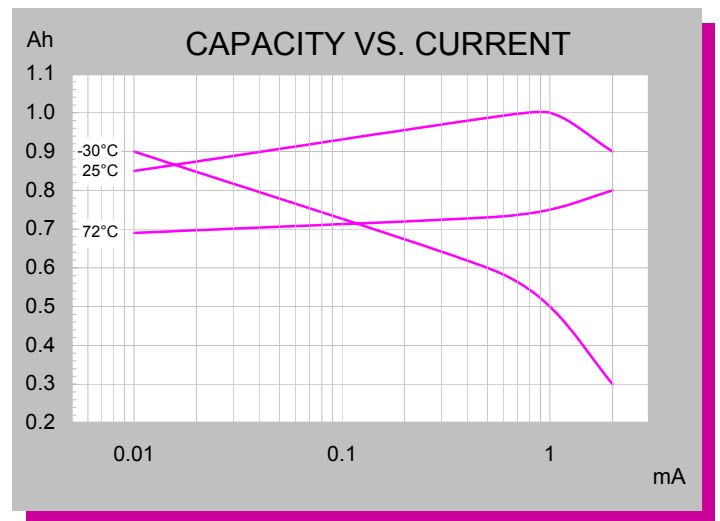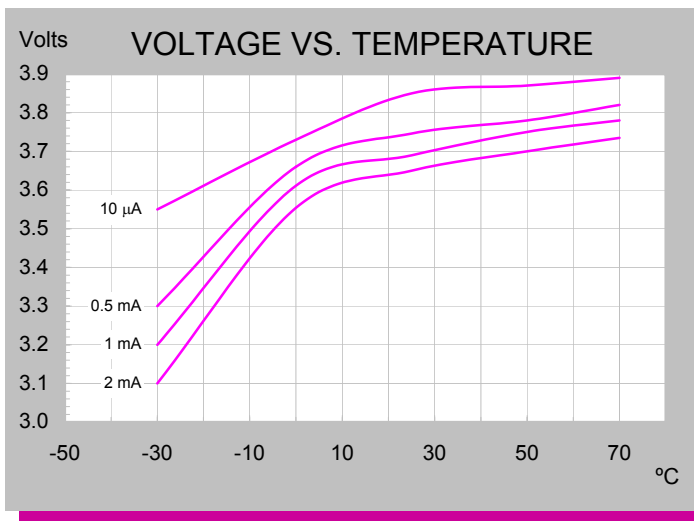

For Pulses Plus Applications Only

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. A, Apr. 07 ECN 1501512